

PolarPlex™ Drop-Away Panels

Specifications Sheet

PolarPlex Drop-Away Panels Specifications

Materials

Aluminum Frame

Material	Clear, anodized aluminum
Frame Profile	1" x 1"

Panel Insert

Material	0.013" polyvinyl chloride plastic
Fire Safety	ASTM Class A UL-Listed FM Global Approved

Panels may be used for installation under fire suppression sprinkler systems with an activation temperature of 165F, in a manner acceptable, and subject to the authorities having jurisdiction. ALWAYS review your installation with the local authorities before you proceed.


Color	Clear
-------	-------

Overall Panels


Panel Dimensions	Standard 4 Foot Aisle Size: 24"W x 52"L Standard 6 Foot Aisle Size: 24"W x 76"L Custom: Variable Height x Variable Width
Panel Weight	2' x 4' Panel weighs 6.8 lbs



Drop-Away Panel Close Up

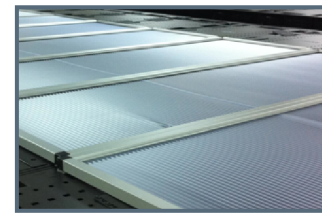

Drop-Away Panels Over Cold Aisle

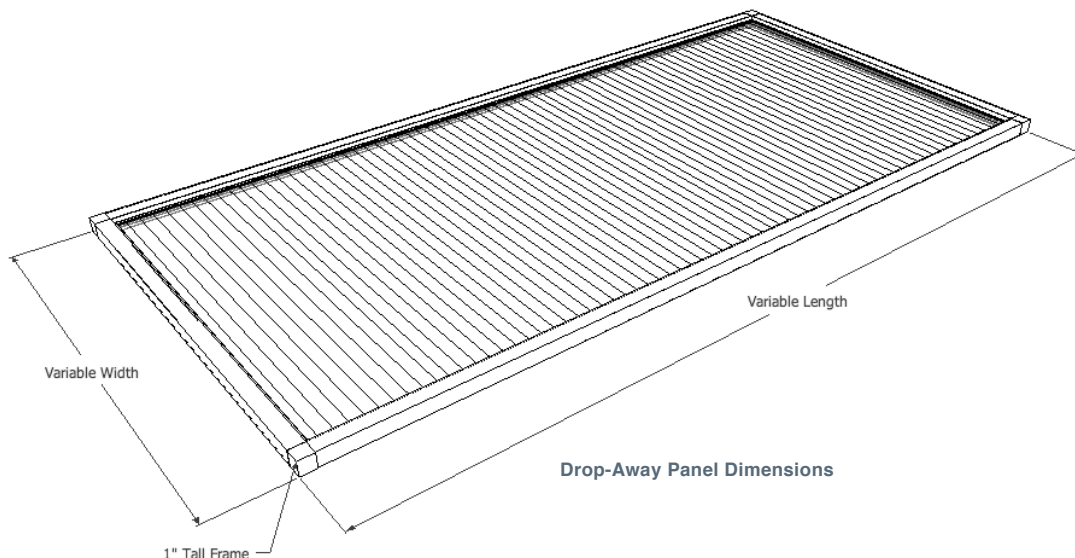

Drop-Away Panel Dimensions